

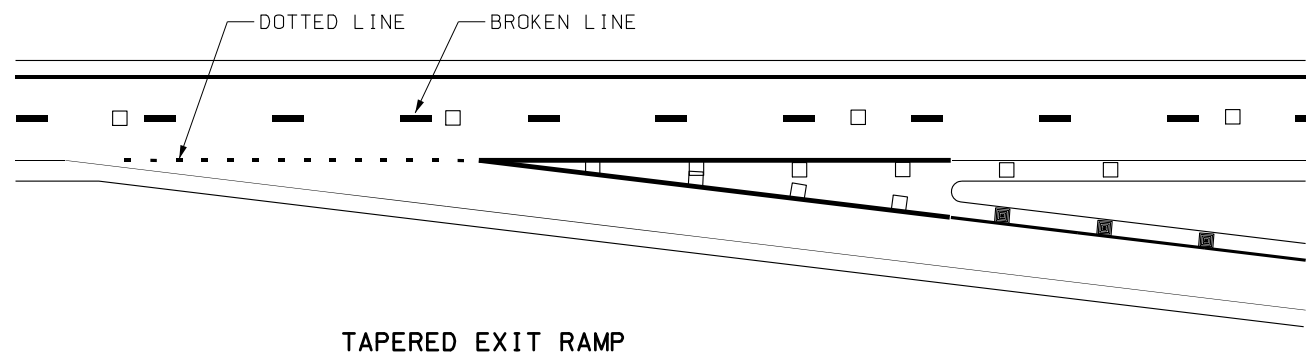
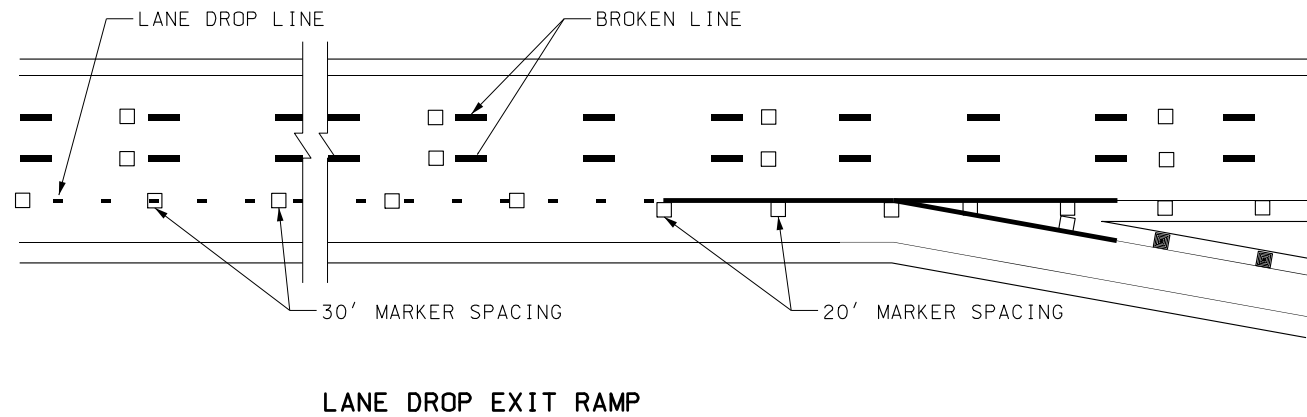
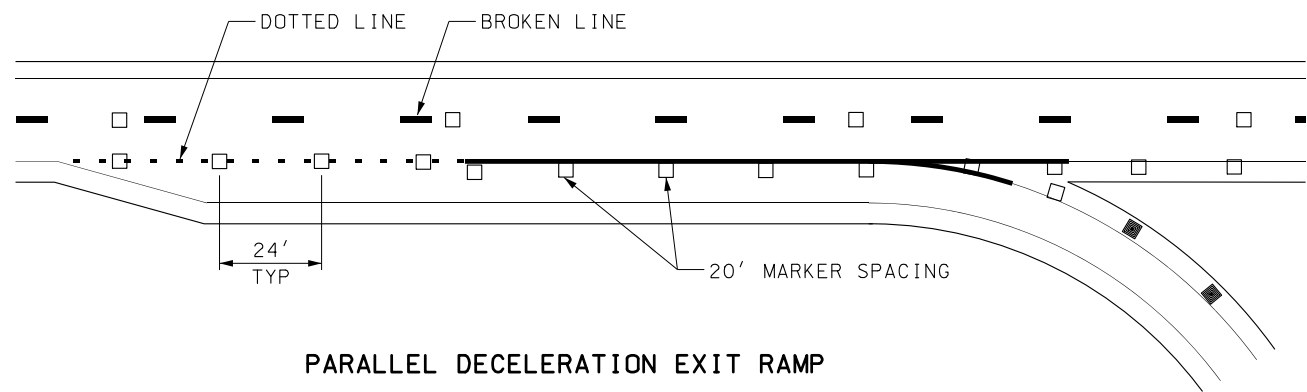
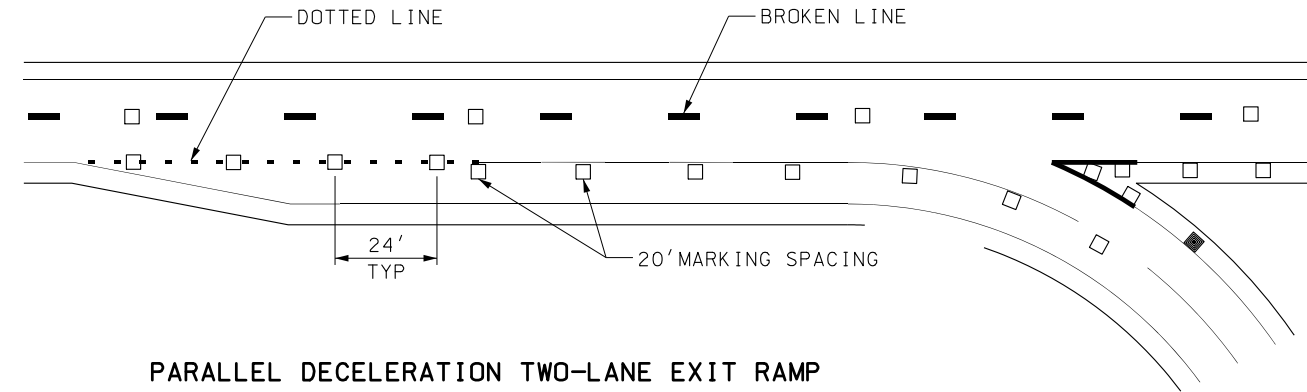
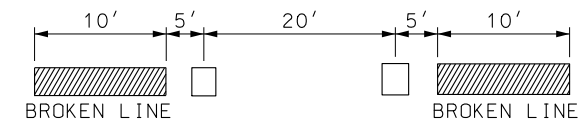


18-DEC-2007 DGN File: L:\Standard Drawings\Imperial\2008\Approved\Stripping (ST)\ST08.dgn

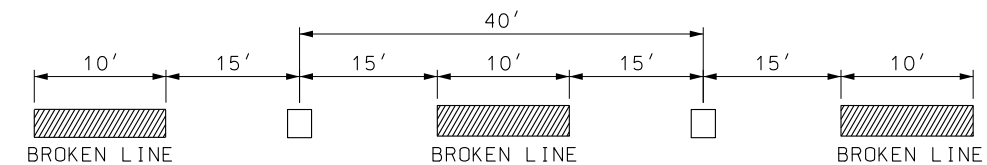


NOTES:


1. PLACE A MINIMUM OF 10 PLOWABLE PAVEMENT MARKERS AT 20' CENTERS IN EACH SIDE OF GORE FROM BEGINNING OF GORE. (MINIMUM TOTAL = 20 MARKERS)
2. WHITE MARKERS SUPPLEMENT WHITE LINES. YELLOW MARKERS SUPPLEMENT YELLOW LINES.
3. THE REGION TRAFFIC ENGINEER WILL APPROVE ALL OTHER LOCATIONS.
4. FOR DIMENSIONS OF VARIOUS LINE TYPES SEE TABLE I ON STD DWG ST 3A.
5. FOR LENGTHS AND LOCATION OF VARIOUS LINES SEE STD DWGS ST 3A, ST 3B, ST 3C AND ST 3D.

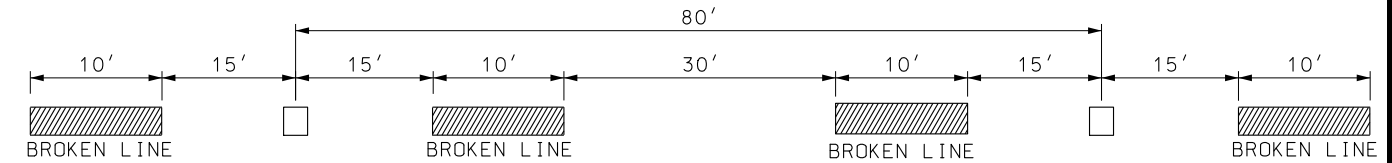

DETAIL "A"

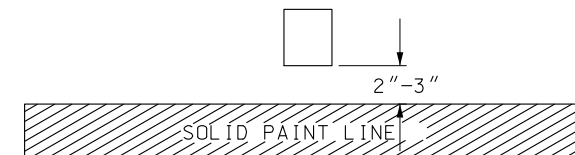

MARKER SUPPLEMENTING SOLID PAINT LINE

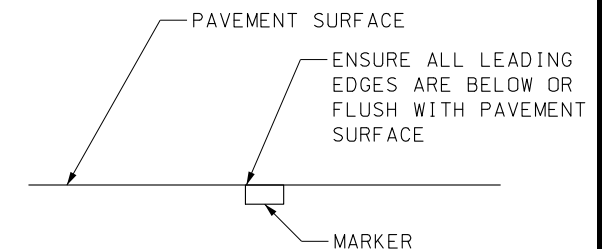

MARKER IN PAVEMENT SURFACE

LEGEND

- = WHITE ONE WAY MARKER
- = YELLOW ONE WAY MARKER
- R = RADIUS OF CURVE

REVISIONS

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
RECOMMENDED FOR APPROVAL
CHAIRMAN STANDARDS COMMITTEE
APPROVED

SALT LAKE CITY
JAN 01 2008
DATE
JAN 01 2008
DATE
DEPUTY DIRECTOR

PLOWABLE PAVEMENT MARKERS

STD DWG
ST 8

STANDARD DRAWING TITLE

REMARKS

NO. DATE APPR.